



**ECOWATER OF ATLANTA**  
TASTE THE DIFFERENCE

Let us  
**Perfect**  
your water and  
**Protect**  
your plumbing.

# EcoProTechT

ECOWATER ANTI-SCALE SYSTEMS

## Environmental Choice for Water Treatment

### PTT™ Anti-Scale Media

Reduces hard water scale from forming in plumbing and appliances.

### Up-flow Design

Increases contact time with media for improved scale reduction and higher flow rates.

### By-pass Valve

Allows for easy maintenance and servicing.

### Coconut-Shell Carbon\*

Filters the water throughout the home without compromising water flow. Removes chlorine taste and odor and eliminates the need for separate carbon filter changes.

### Multi-Wrap Fiberglass Reinforced Tank with Limited Lifetime Warranty

Durable; doesn't deteriorate, rust, or corrode.

### Distributors

Distributors exhibit excellent flow rates.

### No Electricity

Simplifies installation, maintenance and reduces electrical hazards.

### No Salt or Added Chemicals Needed

Uses environmentally friendly "green" technology for areas with water or brine-discharge restrictions.

### Zero Waste Water

No backwashing required and zero discharge.

### Standard Plumbing Connection

1" NPT Male connection for easy installation. Larger 1-1/4" and 1-1/2" plumbing adapters available.

\*Available on ETF2302SM10C only



Back of System




**EcoProTechT Plus**  
ETF2302SM10C  
(Two-Tank System)

**EcoProTechT**  
ETF2300SM10  
(Single Tank System)

 Designed, Engineered &  
Assembled in the U.S.A.

[ecowater.com](http://ecowater.com)

### DIMENSIONS

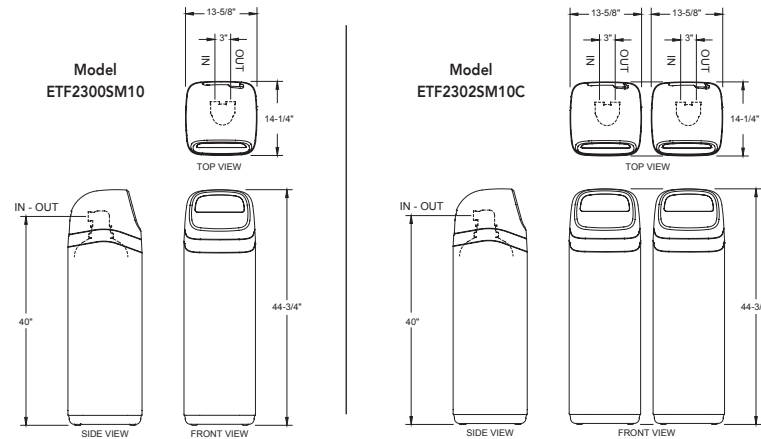

### SPECIFICATIONS

	ETF2300SM10	ETF2302SM10C
Nominal Mineral Tank Size	10" dia. x 35" tall (1)	10" dia. x 35" tall (2)
Service Flow Rate	10 gpm	10 gpm
Intermittent Flow Rate @ 15 psi Pressure Drop**	20 gpm	20 gpm
PTT™ Anti-Scale Media*	4.3 lbs.	4.3 lbs.
Coconut Shell Carbon	—	14 lbs.
HDPE	3 lbs.	6 lbs. (3 lbs./tank)
Maximum Working Pressure (psi)	125	125
Water Temperature Limits (°F/°C)	40-120/4-49	40-120/4-49

\* PTT Media can be added to a system as needed.

\*\* Intermittent flow rate does not represent the maximum service flow rate. Continuous operation at flow rates greater than the service flow rate may affect performance.

### WATER CHEMISTRY

	ETF2300SM10	ETF2302SM10C
pH	6.0 to 9.0	6.0 to 9.0
Hardness (maximum)	25 grains	25 grains
Chlorine	<3 ppm	<3 ppm
Iron (maximum)	0.3 mg/L	0.3 mg/L
Copper	none allowed	none allowed
Oil & H <sub>2</sub> S	none allowed	none allowed
Polyphosphate	none allowed	none allowed
Silica (maximum)	10 ppm	10 ppm



**ECOWATER OF ATLANTA**  
TASTE THE DIFFERENCE



Tested and certified by the Water Quality Association under NSF/ANSI 372 standard for low lead content. Not certified for contaminant reductions by the Water Quality Association.



(678) 456-8346

5490 McGinnis Village Pl. | Suite 228 | Alpharetta, GA 30005

[www.ecowaterofatlanta.com](http://www.ecowaterofatlanta.com)